
feller pivotages sa
MIKROKOMPONENTEN | MICROCOMPOSANTS | MICROCOMPONENTS

Reversing wheel

Typ: 2892 ®*Plus
Construction: Bidirectional, Satellites



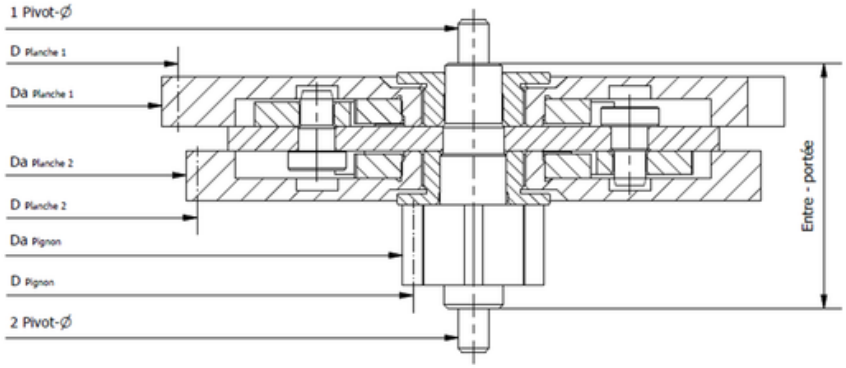

Our high-performance reversing wheel guarantees maximum precision and reliability, especially due to the Feller-Roulage and the latest REACH-compliant materials. By applying the satellite principle, the 'Angle-Mort' is significantly reduced, resulting in a more efficient winding of the spring barrel.

Specifications

• 1 Pivot-Ø	Ø0.19	• $Z_{Planche\ 1}$	37
• 2 Pivot-Ø	Ø0.19	• $Da_{Planche\ 1}$	Ø3.860
• Entre-portée	1.52	• $D_{Planche\ 1}$	Ø3.700
• Z_{Pignon}	8	• $Z_{Planche\ 2}$	34
• Da_{Pignon}	Ø0.877	• $Da_{Planche\ 2}$	Ø3.560
• D_{Pignon}	Ø0.706	• $D_{Planche\ 2}$	Ø3.400

Legend
Z = Number of teeth
Da = Outside diameter
D = Pitch circle diameter

FELLER-SA.CH

®* This trademark is the property of third parties who are not in any way related to Feller Group SA.